

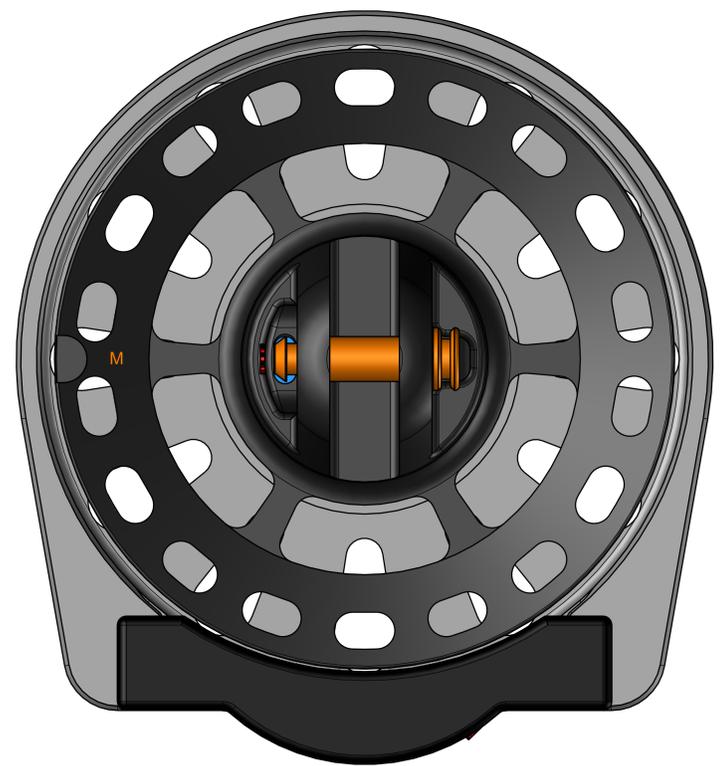
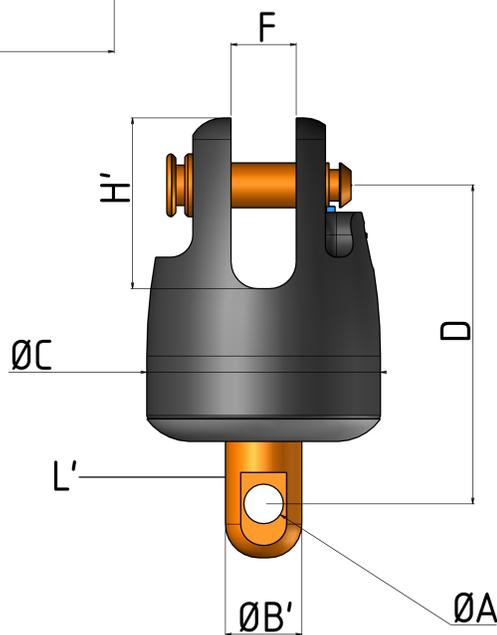
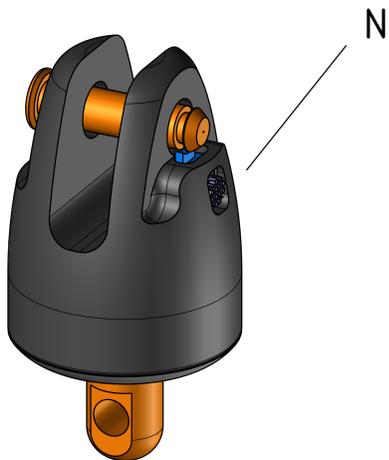


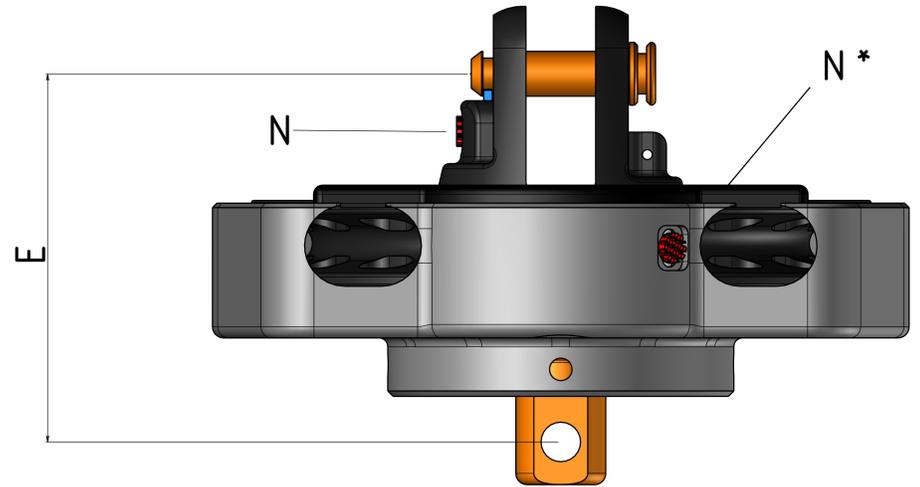

modèle présenté: bottom up 2,5t

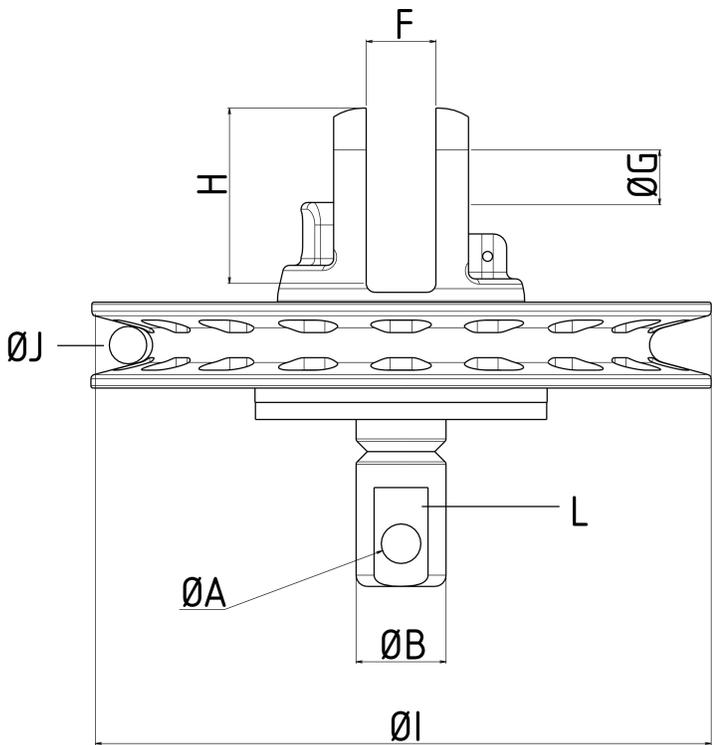

SPECIFICATIONS

| Cotes en mm pour Bottom Up (BU) et Top Down (TD) | 125BU | 125TD | 250BU | 250TD | 500BU | 500TD |
|--|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| ØA | 6,2 | 6,2 | 8,3 | 8,3 | 10,2 | 10,2 |
| ØB-poulie | 15 | 15 | 20 | 20 | 20 | 20 |
| ØB'-émerillon | 15 | 15 | 17 | 17 | 20 | 20 |
| L-cote sur plat poulie | 12 | 12 | 16 | 16 | 18 | 18 |
| L'-cote sur plat émerillon | 12 | 12 | 14 | 14 | 16 | 16 |
| ØC | 42 | 42 | 52 | 52 | 58 | 58 |
| D | 63 | 63 | 73 | 73 | 91 | 91 |
| E | 75 | 95 | 84 | 104 | 104 | 126 |
| F | 14,5 | 14,5 | 14,5 | 14,5 | 20 | 20 |
| ØG | 8 | 8 | 10 | 10 | 12 | 12 |
| H-poulie | 24 | 24 | 26 | 26 | 36 | 36 |
| H'-émerillon | 24 | 24 | 26 | 26 | 26 | 26 |
| ØI | 100 | 100 | 140 | 140 | 196 | 196 |
| ØJ-drosse | 8 | 8 | 10 | 10 | 10 | 10 |
| M-signe entrée drosse | <input checked="" type="checkbox"/> |
| N-bouton ouverture rapide | <input checked="" type="checkbox"/> |
| Charge de travail maximale | 1,25t | 1,25t | 2,5t | 2,5t | 5t | 5t |
| Poids poulie et émerillon | 780gr - 1,719 pounds | 1100gr - 2,425 pounds | 1,361kg - 3 pounds | 1,680kg - 3,704 pounds | 2,86kg - 4,41 pounds | 3,420kg - 7,530 pounds |

BU => EMMAGASINEUR BOTTOM UP POUR VOILE TYPE CODE "D", GENNAKER...
(modèle présenté)

TD => EMMAGASINEUR TOP DOWN POUR SPI ASYMETRIQUE
(voile à guindant libre, couronne rotative indépendante sur la tourelle)